


## 3M™ Double Coated Tape GPT-020, Transparent, 1540 mm x 50 m, 0.2 mm

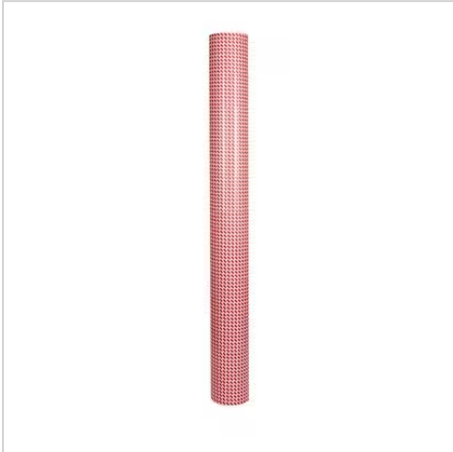

Standard | **In Stock**

- Providing versatility with purpose with the capability to bond to a wide variety of substrates from high to low surface.
- High initial tack and humidity resistance
- High level of peel and shear performance.
- High temperature resistance, providing full bonding performance: up to +190 °C short term, up to +90 °C long term
- 200 micron thick

## Specifications

\* Smallest Saleable Unit ?

### Details

<b>Adhesive Type</b>	High Tack Acrylic
<b>Back-Side Adhesive Thickness</b>	0.095 mm
<b>Back-Side Adhesive Type</b>	Acrylic
<b>Backing (Carrier) Material</b>	Paper
<b>Backing (Carrier) Thickness (Metric)</b>	0.012 mm
<b>Brand</b>	3M™
<b>Face-Side Adhesive Thickness</b>	0.095 mm
<b>Face-Side Adhesive Type</b>	Acrylic

<b>Maximum Operating Temperature (Celsius)</b>	160 Degree Celsius
<b>Number of Adhesive Sides</b>	Double-sided
<b>Overall Length (Metric)</b>	50 m
<b>Overall Width (Metric)</b>	1540 mm
<b>Primary Liner</b>	58# Polycoated Kraft Paper (PCK)
<b>Primary Liner Color</b>	White
<b>Primary Liner Thickness (Metric)</b>	0.1 mm
<b>Product Color</b>	Transparent
<b>Shelf Life</b>	547 Days
<b>Smallest Saleable Unit</b>	Roll
<b>Smallest Saleable Unit*</b>	Roll
<b>Temperature Resistance To - Long Term (metric)</b>	90 Degree Celsius
<b>Temperature Resistance To - Short Term (metric)</b>	160 Degree Celsius
<b>Total Tape Thickness without Liner (metric)</b>	0.2 mm

## Dimensions and Classifications

<b>Case Gross Weight</b>	27.55 Kilogram
<b>Case Height</b>	211 Millimeter
<b>Case Length</b>	1,603 Millimeter
<b>Case Volume</b>	71,367.163 Cubic centimeter
<b>Case Width</b>	211 Millimeter
<b>Pallet Gross Weight</b>	269.141 Kilogram
<b>Pallet Height</b>	778 Millimeter
<b>Pallet Length</b>	1,700 Millimeter
<b>Pallet Volume</b>	1.058 Cubic meter
<b>Pallet Width</b>	800 Millimeter
<b>Roll Gross Weight*</b>	27,508.7 Gram
<b>Roll Volume*</b>	71,367.163 Cubic centimeter
<b>ECCN Number</b>	
<b>Harmonizing code</b>	3919908099

## Packaging and Identifications

<b>Country of Origin</b>	Poland
<b>Country of Origin Disclaimer</b>	This is to advise you that as of this date, the Country of Origin for the product(s) displayed is as follows. This origin is for purposes of Normal Trade Relations (NTR) duty treatment, is for import/export documentation only, and is not

intended to be used for any other purpose such as sales to government entities or Free Trade Agreement eligibility. Government procurement laws and Free Trade Agreements require application of specific criteria that may result in a different Country of Origin than indicated. These determinations are specific to 3M ID.

<b>EAN/GTIN - Consumer (Roll)*</b>	04064035052898
<b>EAN/GTIN - Pallet (Pallet)</b>	04064035022341
<b>EAN/GTIN – Shipper (Case)</b>	04064035022334
<b>Primary Shipping Location</b>	JUECHEN, Nordrhein-Westfalen
<b>Primary Shipping Location Disclaimer</b>	The Primary Shipping Location may not be the final source of the product
<b>per Case</b>	1 Roll
<b>per Pallet</b>	9 Roll

## Transportation

<b>Air Shipping Available</b>	Yes
<b>Dry Ice Shipping Required</b>	No

## Details

- Providing versatility with purpose with the capability to bond to a wide variety of substrates from high to low surface.
- High initial tack and humidity resistance
- High level of peel and shear performance.
- High temperature resistance, providing full bonding performance: up to +190 °C short term, up to +90 °C long term
- 200 micron thick

Designed for Versatility: 3M™ Double coated tape GPT-020P is a transparent, 200 micron thick, modified solventless acrylic adhesive with a white printed PCK paper liner. 3M GPT-020P combines a high level of peel and shear performance enabling high adhesion to a wide variety of substrates both to high and some low surface energy substrates.

It offers high initial tack and humidity resistance. Providing high temperature resistance 190°C short term and 90 °C long term.

## Resources

### Brochures

[3M™ Double Coated Tape GPT-020 and GPT-020F - Brochure, English \(PDF,1.3MB\)](#)

[3M™ GPT-020F Double Coated Tape Brochure \(PDF,1.8MB\)](#)

[03 ProductSelectionGuide DC EN \(PDF,2.4MB\)](#)

### Data Sheets

[3M™ Double Coated Tape GPT-020F Technical Data Sheet \(PDF,1.1MB\)](#)

---

## Related Products

Alternative for



**3M™ Double  
Coated Tape  
GPT-020F,  
Transparent,  
1540 mm x 50  
m, 0.2 mm**