

#### Facestock

A white monomeric, plasticised PVC film.

Basis Weight	112 g/m <sup>2</sup>	ISO 536
Caliper	84 µm	ISO 534

#### Adhesive

A special purpose removable, acrylic based adhesive.

#### Liner

BG45 white, a supercalendered glassine paper.

Basis Weight	70 g/m <sup>2</sup>	ISO 536
Caliper	61 µm	ISO 534
Transparency	50 %	DIN 53147

#### Laminate

Total Caliper	163 µm±10%	ISO 534
---------------	------------	---------

#### Performance data

Initial Tack	6.5 N/25mm	FTM 9 Glass
Peel Adhesion 90°	3 N/25mm	FTM 2 St.St.
Min. Application Temp.	5 °C	
Service temperature	-20°C to 80°C	

#### Adhesive Performance

UVR145 is a removable solvent adhesive exhibiting excellent clarity and UV resistance, clean removability and a smooth peel from PET, PE and PP substrates. The adhesive shows good moisture and solvent resistance meeting the requirements of personal care, cosmetics & baby wet wipes.

#### Applications and use

Applications are predominantly in industrial and chemicals for in- and outdoor use offering good durability and weatherability. Further applications include labels on plastic bottles for household chemicals and motor oil.

#### Conversion & printing

The corona treated face material can be printed by conventional printing techniques including flexo, screen, offset, letterpress, silkscreen, gravure, and hot or cold foiling processes. UV, water-based and solvent-based inks can be used. On-press corona treatment is recommended for optimum ink adhesion. We strongly recommend to use a primer in the printing process of PVC in general. The face material is suitable for Thermal Transfer printing. Exact inks, foils and ribbons should be specified by your ink/foil/ribbon supplier.

#### Special Approvals

The adhesive complies with the European food directives and legislations, FDA 175.105 and the German recommendations XIV as published by BfR. BfR (Bundesinstitut für Risikobewertung) is the German Federal Institute for Risk Assessment. The adhesive can be used in direct contact with dry, non fatty foodstuffs.


#### Shelf life

Two years under storage conditions as defined by FINAT (20-25°C; 40-50%RH)

## AG408

### Fasson®

#### PVC WHITE - UVR145-BG45WH IMP

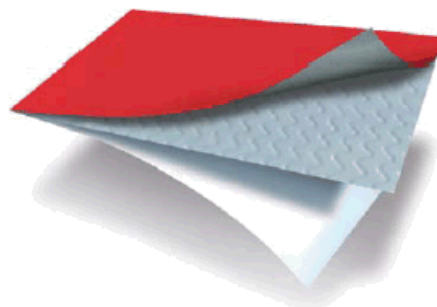

PVC WHITE

UVR145

BG45WH

*This is an automatically generated datasheet. All data to be considered as typical values and subject to change without prior notice. The actual front and liner used might influence adhesive values. Further testing is always recommended.*

*If you would like to make a suggestion or comment on this datasheet, please send an email to [datasheet.mgmt@eu.averydennison.com](mailto:datasheet.mgmt@eu.averydennison.com)*

#### Avery Dennison Materials Group Europe

Willem Einthovenstraat 11  
2342 BH Oegstgeest

The Netherlands  
+31 (0)85 000 2000



#### Warranty

All Avery Dennison statements, technical information and recommendations are based on tests believed to be reliable but do not constitute a guarantee or warranty. All Avery Dennison products are sold with the understanding that purchaser has independently determined the suitability of such products for its purposes. All Avery Dennison's products are sold subject to Avery Dennison's general terms and conditions of sale, see <http://terms.europe.averydennison.com>

©2019 Avery Dennison Corporation. All rights reserved. Avery Dennison and all other Avery Dennison brands, this publication, its content, product names and codes are owned by Avery Dennison Corporation. All other brands and product names are trademarks of their respective owners. This publication must not be used, copied or reproduced in whole or in part for any purposes other than marketing by Avery Dennison.