

### Facestock

A white, surface-sized, supercalendered woodfree printing paper. The facestock is made from FSC® certified paper (FSC Mix Credit, chain-of-custody number: CU-COC-807907, Licence Code: C004451).

Basis Weight	68 g/m <sup>2</sup>	ISO 536
Caliper	66 µm	ISO 534

### Adhesive

A general purpose permanent, acrylic based adhesive.

### Liner

BG40 brown, a supercalendered glassine paper.

Basis Weight	57 g/m <sup>2</sup>	ISO 536
Caliper	51 µm	ISO 534

### Laminate

Total Caliper	128 µm±10%	ISO 534
---------------	------------	---------

### Performance data

Initial Tack	15 N/25mm	FTM 9 Glass
Peel Adhesion 90°	8 N/25mm	FTM 2 St.St.
Min. Application Temp.	5 °C	
Service temperature	-20°C to 80°C	

### Adhesive Performance

The adhesive is characterized by a high initial tack, excellent adhesion and good low temperature performance on a wide variety of substrates.

### Applications and use

This white economical multipurpose paper provides good print resolution of picket fence barcodes and numeric data with thermal transfer print speed up to 150mm/sec. Main applications are print & apply, warehouse inventory labeling and other in-house product identification labels.

### Conversion & printing

This Thermal Transfer face material is developed and selected in close co-operation with leading Thermal Transfer printer and ribbon manufacturers. The print quality of the Thermal Transfer system depends on the correct match of Thermal Transfer ribbon, printer and printing surface, therefore it is strongly recommended to test in application before use.

The smooth surface of this paper is specially suited for single and multicolour line or process printing in all the usual printing technologies. Offers superior print characteristics where a gloss surface finish is not required.

### Special Approvals

S2000NG complies with European food regulation 1935/2004/EC, with the German Recommendation (BfR) XIV and with FDA §175.105. It also meets the demands of the limit values laid down in 10/2011/EU. In accordance with the requirements of relevant EU food regulations, the adhesive S2000NG may safely stand in direct contact with dry, moist and fatty foodstuffs which have a reduction factor of at least 3 according to the Commission Regulation (EU) No 10/2011.


### Shelf life

Two years under storage conditions as defined by FINAT (20-25°C; 40-50%RH)

## BC679

### Fasson®

#### TRANSFER VELLUM FSC - S2000NG-BG40BR

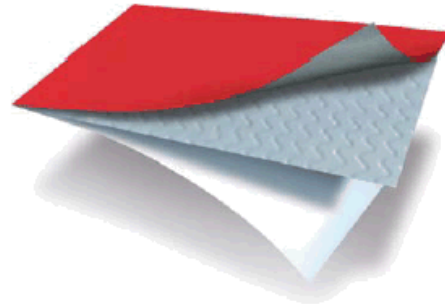

TRANSFER VELLUM FSC

S2000NG

BG40BR

*This is an automatically generated datasheet. All data to be considered as typical values and subject to change without prior notice. Further testing is always recommended.*

*If you would like to make a suggestion or comment on this datasheet, please send an email to [datasheet.mgmt@eu.averydennison.com](mailto:datasheet.mgmt@eu.averydennison.com)*

**Avery Dennison Materials Group Europe**

Willem Einthovenstraat 11  
2342 BH Oegstgeest  
The Netherlands  
+31 (0)85 000 2000

**Warranty**

All Avery Dennison statements, technical information and recommendations are based on tests believed to be reliable but do not constitute a guarantee or warranty. All Avery Dennison products are sold with the understanding that purchaser has independently determined the suitability of such products for its purposes. All Avery Dennison's products are sold subject to Avery Dennison's general terms and conditions of sale, see <http://terms.europe.averydennison.com>



©2016 Avery Dennison Corporation. All rights reserved. Avery Dennison and all other Avery Dennison brands, this publication, its content, product names and codes are owned by Avery Dennison Corporation. All other brands and product names are trademarks of their respective owners. This publication must not be used, copied or reproduced in whole or in part for any purposes other than marketing by Avery Dennison.